



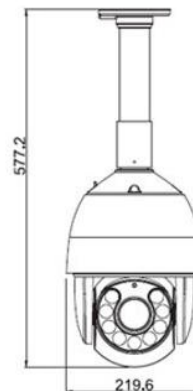

JVS-N85-HK-PLUS

1. 20X optical zoom
2. WDR (DWDR), Day/Night (ICR), DNR (2D&3D), Auto iris, Auto focus, AWB, AGC, BLC
4. Multiple network monitoring: Web viewer, CMS & Mobile
5. Support system dual backup function to make sure no data lost when power off
6. Support power-off memory function, when re-power on, auto back to the before status
7. Support lightning protection, anti-surge, anti-surge function.
8. Outside weather-proof level up to IP66
9. 128 presets, No vibrate even at high speed

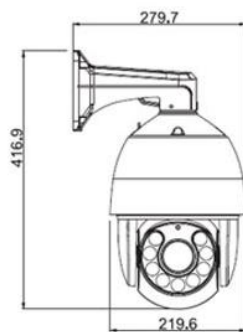

JVS-N85-HK-PLUS Parameter

Camera	Image Sensor	1/3" SONY 2MP CMOS Sensor
	Resolution	2MP
	Effective Pixels	1920*1080
	Compression	H.264/MJPEG
	TV System	PAL/NTSC
	Frame Rate	MAX 30FPS
	Bitrate	128Kbps~10Mbps
	Synchronization	Internal
	SNR	54dB
	Min Illumination	0Lux(IR ON)
	Focus Mount	M12
Lens	Lens	4.7±5%~94±5%mm Optical Zoom 20X
	Viewing Angle	0°~360° Vertical: -3°~90°
	Viewing Distance	1M~ 1,000M (Wide-Tele)
	Focus Control	Auto /Manual
	Pan / Tilt Range	Pan: 360° endless; Tilt: -0° ~ 90° (Auto-Flip)
PTZ	Pan / Tilt Speed	Pan Speed: 0.6° ~ 200° /s,Tilt Speed: 3.5° ~ 35° /s
	Proportional Zoom	support
	Number of Preset	128
	Patrol	8 patrols, up to 32 presets per patrol
	Park Action	Pattern / Pan Scan / Tilt scan / Random scan / Frame scan
	Exposure Mode	Auto
Function	Gain Contorl	Auto
	White Balance	Auto

	Digital Noise Reduction	3D DNR
	Network TimeSyn	Support
	Scheduled Restart	Support
	ROI	Support
	IR Sensitivity	Adjustable
	Defog	N/A
	Motion Detection	Support
	Video Adjust	Supports contrast, brightness, saturation, sharpness adjustment
	Scene	Support Indoor、Outdoor、Default、Soft scenes
	Day & Night	IR cut filter with auto switch, Support Color to Black
	Corridor Mode	N/A
	Electronic screen	Support Exposure time setting,solve view electronic screen problem
	Night Self-Adaption	Support
	Wide Dynamic Range	N/A
	Image setting	Mirror、Rotate
	IP Self-Adaption	Support
	Alarm	E-mail、Client
	Remote Operation	System、Stream、User、Network Management
	External Interface	Support Audio Input
	Ethernet	1 RJ45 10M/100M Adaptive Ethernet Interface
Network	Tri-Stream	Support
	Protocol	Support HTTP,TCP/IP,ICMP,RTSP,RTP,UDP,RTCP,SMTP,FTP,DHCP,DNS,PPPOE
	System Compatibility	ONVIF 2.4
	Transmission	Internal Cloudsee Protocol
	Browser	IE8+,Chrome18+,Firefox5.0+,Safari5.02+ browsers
	User Permission	Up to 13 users, Three level authority: Administrator、User、Visitor
	Infrared Lamp	9 high power dot matrix infrared lamps
General	IR Distance	100M
	Power Supply	DC 12V

	PoE Power	Optional
	Working Temperature	-20℃～+60℃
	Working Humidity	10%～90%
	Power	Day: 15W Night: <36W
	Material	Metal
	Size((W×H×D) (mm)	290*290*450mm
	Weight (KG)	5.5KG
	Installation	Rack/Ceil Mounting